SOLAR EPC

10 kWp rooftop Solar

INDICATIVE QUOTATION AND ENGINEERING REFERENCE

REFERENCE ONLY - SUBJECT TO FORMAL CONFIRMATION. This pre-survey estimate preserves the original quantities, unit selling prices and quotation reference. Supplier purchase prices, the roof, point of connection and contract-specific taxes require confirmation. It is not an approved design, signed offer, compliance certificate or outage-backup commitment.

QUANG ANH ELECTRICAL CONSTRUCTION COMPANY LIMITED

Floor 9, Pearl Plaza Office Tower, 561A Dien Bien Phu, Thanh My Tay Ward, Ho Chi Minh City, Vietnam

Tax identification number: 0316365712 | 0919 758 191 | sales@quanganhcgte.com | https://quanganhcgte.com/

REFERENCE ONLY - SUBJECT TO FORMAL CONFIRMATION

PRE-SURVEY ESTIMATE

Quotation reference: QAC-SOL-EST-20261104-E24CAA4E | Date: 04/11/2026

Dear Customer,

Project: Solar power system

Location: project site to be confirmed

Indicative quotation based on the available information. The scope and technical solution will be confirmed after the site survey and design review.

CONFIGURATION AND SCOPE

Required: 10.00 kWp | Planned installation: 10.24 kWp DC | 10 kW AC | DC/AC 1.024

16 LONGi Solar LR7-72HVH-640M modules; 1 Sungrow SG10RT-P2 inverters

1 strings; 16-16 modules/string. Module area 43.2 m²; entered gross roof area 80.0 m².

Standard package | Supply and installation items are listed in the detailed table.

Quotation value (VND)

Total before VAT	132,415,488
VAT scenario - 10%	13,241,549
Total including VAT	145,657,037

English edition: 05 Nov 2026. The original reference and pricing snapshot are retained. VAT is a scenario; the applicable rate is confirmed under the contract/invoice.

QuangAnhcons

1. Detailed supply and installation BOQ

53 priced lines. Original item codes, quantities, unit selling prices and line amounts are retained. VND values exclude VAT unless explicitly stated.

ID	Material / work item	Specification / scope	Unit	Qty	Unit price (VND)	Amount (VND)
	I. MAIN EQUIPMENT					91,051,949
1	LONGi Solar LR7-72HVH-640M photovoltaic module	640 Wp · 2382x1134x30mm	module	16	3,263,020	52,208,320
2	Sungrow SG10RT-P2 grid-connected inverter	10 kW AC · 400 V · 3-phase · 2 MPPT	set	1	28,906,301	28,906,301
3	Residential inverter communications kit	Data acquisition and monitoring. Export-control capability depends on the confirmed configuration.	lot	1	1,813,558	1,813,558
4	RS485 shielded twisted-pair cable, 2 × 0.75 mm²		m	50	37,385	1,869,250
5	RJ45 Cat6 UTP Ethernet patch lead, 1.5 m		piece	2	95,396	190,792
139	3-phase export-control meter/CT kit	Bidirectional power measurement for control at the point of connection.	piece	1	2,430,453	2,430,453
141	Export-control integration and response/loss-of-signal testing	Export-limiting integration and interlock testing to the confirmed design.	lot	1	2,430,424	2,430,424
142	Network infrastructure, auxiliary power and monitoring enclosure - scope to be finalised	Additional monitoring infrastructure depends on the actual layout. Configuration requires confirmation.	lot	1	1,202,851	1,202,851
	II. MOUNTING STRUCTURE / ALUMINIUM MATERIALS					6,334,752
6	L-foot kit for metal roofing, fasteners and weather-sealing gaskets		set	34	30,002	1,020,068
7	Extruded aluminium rail, 4.35 m long	Chiko	length	10	405,180	4,051,800
8	Aluminium rail splice with stainless-steel M8 bolts		set	8	23,846	190,768
9	Mid clamps for 30 mm module frames, including bolts, nuts and washers	Chiko	set	30	14,335	430,050

QuangAnhcons

ID	Material / work item	Specification / scope	Unit	Qty	Unit price (VND)	Amount (VND)
10	End clamps for 30 mm module frames, including bolts, nuts and washers	Chiko	set	4	14,292	57,168
11	Earthing clip for mid clamps	Chiko	set	30	14,335	430,050
12	Earthing conductor clamp with stainless-steel M8 bolt	Chiko	set	2	29,776	59,552
14	DC cable clips suited to the outer diameter of 4 mm² PV cable	Chiko	set	32	2,978	95,296
	III. DC CABLES / DC ACCESSORIES					1,043,348
17	Solar DC cable, 4 mm², 1500 VDC - black	Leader DC-4-BK · Single-core PV cable; 1 core; 1,500 VDC; UV-resistant.	m	19	20,094	381,786
18	Solar DC cable, 4 mm², 1500 VDC - red	Leader DC-4-RD · Single-core PV cable; 1 core; 1,500 VDC; UV-resistant.	m	19	20,094	381,786
19	DC connector pair matching the equipment manufacturer's brand/series	Leader · Connectors from a matching brand/series compatible with the equipment.	pair	2	38,926	77,852
20	Outdoor DC protective conduit - diameter and material to be selected	CVL	m	3.8	13,342	50,700
21	DC protective-conduit connector - to match conduit diameter	CVL	set	2	8,891	17,782
22	Black UV-resistant cable ties, 5 × 200, pack of 500	KST	pack	1	66,721	66,721
23	Black UV-resistant cable ties, 5 × 300, pack of 250	KST	pack	1	66,721	66,721
	IV. AC SWITCHBOARDS / MSB BLOCKS / ACBs / MCCBs					4,972,673
26	Small Solar enclosure, N/PE terminal bars and accessories	Enclosure only; circuit breakers and busbars are listed separately.	piece	1	2,269,691	2,269,691

QuangAnhcons

ID	Material / work item	Specification / scope	Unit	Qty	Unit price (VND)	Amount (VND)
36	AC SPD - Type, Uc, Up, In/Imax and coordination to be confirmed - 3 phase	SMALL-PROTECTION-3P-25	set	1	1,693,370	1,693,370
38	Inverter-branch MCCB, 400 VAC, 25 A - 3 phase	SMALL-PROTECTION-3P-25 · Icu/Ics must suit the prospective short-circuit current at the installation point.	piece	1	1,009,612	1,009,612
	V. LV AC CABLES / BUSDUCT / ACCESSORIES					4,499,673
39	Copper AC cable, 5 cores × 4 mm², including PE	CADIVI AC-5C-4-CONFIRM · Cu/XLPE/PVC · 0.6/1 kV	m	10	150,532	1,505,320
40	Main cable, CXV 1C-4 mm², 1 parallel runs per phase and neutral	CADIVI · Cu/XLPE/PVC · 0.6/1 kV	m	40	26,696	1,067,840
41	Main PE cable, CXV 1C-4 mm², 0.6/1 kV	CADIVI · Cu/XLPE/PVC · 0.6/1 kV	m	10	26,350	263,500
43	Copper cable lug, 4 mm² - main cable	CU-LUG-4	piece	8	11,128	89,024
44	Cable-lug connection bolts - size to suit the equipment terminals	Cadivi	set	8	22,288	178,304
45	Copper cable lug, 4 mm² - inverter phase and neutral	CU-LUG-4	piece	8	11,128	89,024
46	Copper cable lug, 4 mm² - inverter PE	CU-LUG-4	piece	2	11,115	22,230
56	AC cable protective conduit - diameter to suit cable size and fill	CVL	m	8	50,335	402,680
57	AC protective-conduit connector - to match conduit diameter	CVL	set	2	20,013	40,026
60	String labels and DC/AC warning labels		piece	12	5,005	60,060
61	DC/AC cable glands for inverters and switchboards		piece	15	50,629	759,435
63	Main-route copper PE cable lugs and insulating boots, 4 mm²	MAIN-PE-LUG-BOOT-4	piece	2	11,115	22,230

QuangAnhcons

ID	Material / work item	Specification / scope	Unit	Qty	Unit price (VND)	Amount (VND)
	VI. CABLE TRAYS / LADDERS / WALKWAYS					8,513,781
64	Cable tray, 100 × 50 × 1.5 mm, including cover, connectors and bolts		m	5	216,477	1,082,385
67	AC cable-tray/ladder route - dimensions pending cable arrangement		m	20	184,660	3,693,200
81	Cable-tray supports, threaded rods and purlin clamps		set	15	145,779	2,186,685
144	Additional cable-tray/ladder accessories pending route take-off	Accessories follow the actual routes. Confirm the detailed list.	lot	1	1,551,511	1,551,511
	VII. EARTHING					3,323,558
143	Additional earthing/equipotential-bonding scope pending survey and design	Indicative scope. Earthing quantities and the solution require confirmation after the survey.	lot	1	3,323,558	3,323,558
	X. LABOUR AND INSTALLATION EQUIPMENT					8,991,872
111	Labour for frames, modules, access platforms, cable trays and mechanical structures		person-hour	24	110,991	2,663,784
112	Labour for cable installation, electrical terminations and earthing		person-hour	12	121,711	1,460,532
113	Roof lifting equipment		shift	1	759,844	759,844
114	Freight and delivery		trip	1	631,834	631,834
136	Site technical management and supervision	QuangAnhcons	engineer-day	1	1,539,367	1,539,367
138	Mobilisation, site organisation and clearance	QuangAnhcons	visit	1	1,936,511	1,936,511
	XI. DOCUMENTATION / REGULATORY WORK / TESTING					3,683,882

QuangAnhcons

ID	Material / work item	Specification / scope	Unit	Qty	Unit price (VND)	Amount (VND)
115	Review of input documents, Solar project procedures and connection checklist	EPC scope as listed. Third-party inspection/review fees are confirmed separately.	engineer-hour	2	315,079	630,158
116	Roof-structure survey/document review and coordination of existing-condition images/layouts	EPC scope as listed. Third-party inspection/review fees are confirmed separately.	engineer-hour	3	316,368	949,104
117	Preliminary engineering/SLD/layout, installation method, occupational safety and QA/QC	EPC scope as listed. Third-party inspection/review fees are confirmed separately.	engineer-hour	4	317,658	1,270,632
118	Testing, commissioning, internal acceptance and as-built/handover documentation	EPC scope as listed. Third-party inspection/review fees are confirmed separately.	engineer-hour	3	277,996	833,988
	Total before VAT					132,415,488
	VAT scenario - 10%					13,241,549
	Total including VAT					145,657,037

QuangAnhcons

2. Assumptions, commercial conditions and exclusions

PRE-SURVEY ESTIMATE

APPLIED PARAMETERS

Roof elevation: 4 m. Budget assumption. This is ground-to-roof elevation. Defaults, where not entered, are 4 m for a house, 10 m for a factory and 0 m for a yard. These are not standard heights or frame elevations. Wind loading and lifting require separate checks.

One-way DC route per string: 19 m. Budget assumption per string. The default inverter position is below the roof, so the route includes elevation, horizontal and roof runs. For a roof-mounted inverter, enter the actual route.

Roof coverage factor: 70%. Entered parameter, subject to verification. 70% is a preliminary layout scenario, not a substitute for the layout, fire-safety clearances or shading analysis.

Cold cell temperature: 0 °C. Budget assumption. Confirm the minimum cell temperature using site climate data and manufacturer instructions.

Hot cell temperature: 70 °C. Budget assumption. 70 °C is a scenario value. Cell temperature requires a model covering irradiance, wind and mounting conditions.

AC-current allowance: 1.00 times. Budget assumption. Use the manufacturer's maximum AC current for Ib and follow its circuit-breaker instructions. Do not treat 1.25 as a universally mandatory IEC AC factor.

Anchor spacing: 1.20 m. Budget assumption for material quantities only. Confirm wind loading, roof zones, purlin/anchor capacity, spans and rail layout.

Basic rail/clamp mass: 3 kg/m². Budget assumption. Basic rails/clamps only; selected steel frames, reinforcement and bases are counted separately in the mass check. Structural capacity has not been verified.

Productivity factor: 85%. Budget assumption. The internal productivity allowance has not been calibrated against site records.

Screw-fixed metal roofing, 3-phase supply. Base pricing includes modules, grid-connected inverters, ordinary module rails/clamps/feet and the listed materials and installation, assuming the existing structure is suitable. Elevated frames, foundations, reinforcement, BESS and a new substation are included only when selected and priced separately.

REQUIREMENTS AND PROPOSAL BASIS

Location: Ho Chi Minh City (simulation scenario; replace with the actual surveyed site); house/shop; Solar self-consumption; 3-phase supply; screw-fixed metal roof/site.

User-selected capacity

Regional QAC scenario; no site-specific simulation

Sensitivity range under the stated assumptions, not a confidence interval or guaranteed generation. It does not resolve model-specific inverter clipping, individual roof orientations or weather on the outage day.

Confirm usable area, roof orientation/pitch, shading, structural capacity, anchors and site-specific regulatory/fire-safety requirements.

Confirm the PCC, permitted capacity, cable routes, protection, export conditions and valid equipment prices.

Scenario energy yield: 13,312-17,408 kWh/year.

QUOTATION CONDITIONS

Scope: supply and installation of items with quantities in the table; grid-connected self-consumption. Battery storage is not included.

Outage backup: a design to supply loads during grid outages is not included. Energy-shifting BESS does not automatically provide backup operation.

QuangAnhcons

Point of connection: 1 Solar switchboards are expected to connect to the LV system within the selected scope. Confirm hosting capacity and short-circuit current on site.

Quantities: based on the configuration and assumed routes. Confirm after the survey, module layout and installation design. Agree scope changes in writing.

Exclusions: screw-fixed metal roofing, 3-phase supply. Base pricing covers modules, grid-connected inverters, ordinary module rails/clamps/feet and the materials and installation listed in the table, assuming the existing structure is suitable. Elevated frames, foundations, reinforcement, BESS and a new substation are included only when selected and priced separately. Unpriced items, new fire-fighting or direct-strike lightning systems and third-party fees outside the table are excluded.

Technical basis: formulas and results are provided in the calculation annex. References include TCVN 7447-7-712:2019, TCVN 2737:2023, IEC 62548-1 and IEC 62446-1. This preliminary configuration does not replace an approved design.

Taxes and validity: unit prices exclude VAT. VAT is provisional at the stated rate and is applied under the contract/invoice. Prices are reconfirmed when the order is placed.

Schedule: agreed after the survey, scope definition, supply confirmation and installation conditions.

Payment (EPC/installation): milestones and percentages are agreed by both parties in the contract.

Warranty: subject to the policies for the exact equipment models and the installation terms agreed in the contract.

Contact: Sales Department | QuangAnhcons | 0919758191 | sales@quanganhcgte.com | quanganhcgte.com

Indicative schedule: 24 working days, including 10 site days. Monday-Saturday calendar; holidays and outage windows are not deducted. This is not an execution commitment.

Preliminary results use the entered information and displayed assumptions. A survey, design verification and written confirmation of prices/scope are required before ordering or installation. This is not an approved design or a backup-supply commitment. Current legal obligations still apply.

Developed and operated by QuangAnhcons. © 2026 QUANG ANH ELECTRICAL CONSTRUCTION COMPANY LIMITED. This quotation was prepared by QuangAnhcons. Retain the preparer's name and reference number when saving or sharing. Third-party names and documents belong to their respective owners.

3. Electrical calculations with substituted values

Actual DC nameplate capacity

Formula: $P_{DC} = N_{module} \times P_{module}/1{,}000$ (kWp).**Substitution:** 16 × 640 / 1,000 = **10.24 kWp DC**.

Inverter capacity and DC/AC ratio

Formula: $r = P_{DC} / P_{AC}$.**Substitution:** 10.24 / 10 = **1.024 times**.

Module surface area and usable roof area

Assumed formula: $A_{module} = N \times L \times W$.**Substitution with an example module measuring 2.382 × 1.134 m:** 16 × 2.382 × 1.134 ≈ **43.22 m² of module surface**. Actual roof area must also allow for clearances, maintenance access, walkways and shading exclusion zones. This area calculation does not certify the roof's structural capacity.

Indicative AC current for checking the electrical arrangement

Ba pha: $I \approx P/(\sqrt{3} \times U_{LL} \times \cos\varphi)$. With 10 kW, 400 V and assumed $\cos\varphi = 0.99$: $I \approx 10 \times 1{,}000/(\sqrt{3} \times 400 \times 0.99) \approx$ **14.6 A**.**Single phase, where permitted:** 10 × 1,000/(230 × 0.99) ≈ **43.9 A**. Neither result is the inverter model's maximum output current.
Select circuit breakers and cables using manufacturer Imax, corrected Iz, installation conditions, voltage drop and prospective short-circuit current. This preliminary current is not sufficient on its own for procurement.

Complete preliminary calculation annex

DC capacity

PDC = (Nmod × PSTC) / (1000)

2. Result: 10.240 kWp

Datasheet module · Preliminary result

Nominal AC capacity

PAC = Ninv × PAC,unit

2. Result: 10.000 kW

Inverter datasheet. This is not kWh generation or the actual output at every moment. · Preliminary result

DC/AC ratio

rDC/AC = (PDC) / (PAC)

2. Result: 1.024 times

Target 1.25; clipping simulation required · Preliminary result

Module area

APV = Nmod × l × b

2. Result: 43.219 m²

Dimensions for the exact model · Preliminary result

Module mass

MPV = Nmod × mmod

2. Result: 456.000 kg

Datasheet weight; excludes people, stored materials, wind, water and mounting frames · Preliminary result

PV dead load over the module area

qPV = ((MPV + Mrail + Msteel + Vfoundation × 2400) × g) / (1000 × APV)

2. Result: 0.133 kPa

Preliminary mass includes the selected steel/frame and bases; concrete density is assumed at 2,400 kg/m³. An average load does not replace concentrated anchor/foot loads, wind loads or roof/foundation structural verification. · Preliminary result

Ponding load

qw = hmm × 0.00980665

2. Result: Additional data required

Illustrative additional load; 0 means not entered, not confirmation that the risk is absent · Ponding depth not entered

Rainwater drainage

Qrain = (C × i × Aroof) / (3600)

2. Result: Additional data required

Flow continuity. Confirm rainfall intensity, catchment area, slope and drainage cross-section. · Additional data required

Outlet count for the entered drainage capacity

Noutlet = ⌈(Qrain) / (qoutlet)⌉

2. Result: Additional data required

Not calculated without rainfall intensity i and outlet capacity q. · Additional data required

Water per cleaning cycle

Vw = APV × vw

2. Result: 86.438 L

Entered operating allowance; it does not automatically change the water-system material scope · Preliminary result

Cleaning-water flow rate

Qw = (Vw) / (1000 × th)

QuangAnhcons

2. Result: 0.022 m³/h

Pump head = elevation + losses + nozzle pressure. Flow alone does not select the pump. · Preliminary result

Cold-string Voc

Uoc,cold = Nmax × Uoc × [1 + |βVoc| × (25 − Tmin)] × 1.03

2. Result: 929.225 V

Inverter limit; the 3% reserve is a design assumption · Preliminary result

Hot-string Vmp

Ump,hot = Nmin × Ump × [1 + βVmp × (Tmax − 25)]

2. Result: 601.167 V

Provisional Vmp coefficient −0.34%/°C; manufacturer confirmation required · Preliminary result

DC cable length per polarity

LDC,+ = LDC,− = Nstr × Lavg

2. Result: 19.000 m

Measured or assumed route: 19 m · Preliminary result

DC voltage drop

ΔuDC = (2 × Imp × ρ × L) / (S × Ump,hot) × 100%

2. Result: 0.513 %

STC Imp, rho=22.5 Ω·mm²/km and hot-string Vmp. Check bifacial current, Iz and connectors against manufacturer requirements. · Preliminary result

AC branch - Iz

Iz = Iz,tab × kT × kg × nparallel

2. Result: 29.120 A

Cu XLPE reference ampacity for installation methods C/F with 3 loaded conductors. Confirm cable arrangement and neutral loading. · Preliminary result

AC branch - voltage drop

ΔuAC ≈ (√3 × Ib × ρ × L) / (S × nparallel × ULL) × 100%

2. Result: 0.407 %

Preliminary resistance-only calculation; it does not replace Rcosφ+Xsinφ or short-circuit checks · Preliminary result

Main AC route - Iz

Iz = Iz,tab × kT × kg × nparallel

2. Result: 29.120 A

Cu XLPE reference ampacity for installation methods C/F with 3 loaded conductors. Confirm cable arrangement and neutral loading. · Preliminary result

Main AC route - voltage drop

ΔuAC ≈ (√3 × Ib × ρ × L) / (S × nparallel × ULL) × 100%

2. Result: 0.407 %

Preliminary resistance-only calculation; it does not replace Rcosφ+Xsinφ or short-circuit checks · Preliminary result

Installation-phase person-hours

Hinstall = Hbase,mount + Hstructure + HBESS + HTX

2. Result: 24.000 person-hours

Includes base installation labour and selected additional work. These are person-hours, not elapsed hours. · Preliminary result

Electrical person-hours

H = ⌈(Hbase) / (ηlabor)⌉

2. Result: 12.000 person-hours

Cables, connectors, inverters, switchboards and earthing · Preliminary result

QuangAnhcons

Installation-phase working days

Dinstall = ⌈(Hinstall) / (Ncrew × hday)⌉

2. Result: 1.000 working days

Additional installation person-hours are included. Confirm the actual sequence and crews. · Preliminary result

Electrical working days

Delec = ⌈(Helec) / (Nelec × hday)⌉

2. Result: 2.000 working days

Electrical crew of 1 · Preliminary result

AC overload protection

Ib ≤ In ≤ Iz; I2 ≤ 1.45 × Iz

2. Result: Additional data required

Protection-selection relationships. Check IEC 60364, circuit-breaker characteristics and manufacturer instructions. The calculator has not verified I2, disconnection times, Icu/Ics or selectivity. · Additional data required

PE thermal withstand

SPE ≥ (√(Ifault2 × t)) / (k)

2. Result: Additional data required

Adiabatic method within its applicable scope. Fault current, clearing time and the correct material/insulation factor k are required. There are insufficient data for a conclusion. · Additional data required

Module upper-edge elevation above ground

Htop = Hroof + c + l × sin θ

2. Result: 4.610 m

The entered roof elevation is at the lower module-row edge; one portrait module is assumed. Do not infer total building height from floor count. · Preliminary result

Frame and reinforcement steel mass

Madded = Mframe + Mreinforcement

2. Result: 0.000 kg

Sum the selected steel items without counting the base rails/clamps again. Allowances support budgeting only; structural drawings are required. · Preliminary result

Base and foundation mass

Mfoundation = Vfoundation × ρconcrete

2. Result: 0.000 kg

Concrete density 2,400 kg/m³. Volumes follow the allowance for each mounting arrangement. Concentrated loads and ground conditions have not been checked. · Preliminary result

Wind, anchor and structural-capacity checks

Ed ≤ Rd

2. Result: Additional data required

Site coordinates, wind zone/terrain, height, roof dimensions, edge/corner zones, materials, purlins, connections and ground conditions are required. Structural capacity cannot be inferred from kg/m² alone. · Additional data required

Horizontal projection of the modules

Ahorizontal = APV × cos θ

2. Result: 42.560 m²

Geometric relationship only; it does not determine clearances, shading or generation. · Preliminary result

Installation person-hours including additional scope

Htotal = Hbase,mount + Hbase,elec + Hstructure + HBESS + HTX

2. Result: 36.000 person-hours

Selected structural, BESS and substation labour is included in the schedule. Its allocation to the installation phase is an allowance; the actual crews must be agreed. · Preliminary result

QuangAnhcons

Module mass per module area

mA = (MPV) / (APV)

2. Result: 10.551 kg/m²

Uses the data for the displayed option. Confirm actual dimensions and layout. · Preliminary result

Usable roof area

Ausable = max(0; Agross − Aexcluded) × kslope

2. Result: 80.000 m²

Uses the data for the displayed option. Confirm actual dimensions and layout. If the input is a horizontal roof projection and modules follow the roof, k = 1/cos(roof pitch); otherwise k = 1. · Preliminary result

Ancillary area and clearances

Aaccess = max(0; Aroof − APV)

2. Result: 36.781 m²

Uses the data for the displayed option. Confirm actual dimensions and layout. · Preliminary result

Annual energy - low scenario

Eyear = round(PDC × Ylow; 0)

2. Result: 13312.000 kWh/year

Energy scenario based on the displayed inputs and assumptions. Hourly PV/demand has not been simulated here and generation is not guaranteed. · Preliminary result

Annual energy - high scenario

Eyear = round(PDC × Yhigh; 0)

2. Result: 17408.000 kWh/year

Energy scenario based on the displayed inputs and assumptions. Hourly PV/demand has not been simulated here and generation is not guaranteed. · Preliminary result

Average daily PV energy

EPV,day = round((PDC × Y) / (365.25); 2)

2. Result: 42.050 kWh/day

Energy scenario based on the displayed inputs and assumptions. Hourly PV/demand has not been simulated here and generation is not guaranteed. · Preliminary result

Average daily electricity consumption

Eload,day = (Emonth × 12) / (365.25)

2. Result: 0.000 kWh/day

Energy scenario based on the displayed inputs and assumptions. Hourly PV/demand has not been simulated here and generation is not guaranteed. · Preliminary result

Entered target capacity

Ptarget = Pentered

2. Result: 10.000 kWp

User-selected value. Installed capacity also depends on whole-module counts, the roof and the electricity supply. · Preliminary result

N: quantity; P: power; U: voltage; I: current; S: conductor cross-section (mm²); L: one-way length (m); ρ = 0.0225 Ω·mm²/m in voltage-drop calculations; g = 9.80665 m/s²; β: temperature coefficient per 1/°C; ⌈x⌉: round up to an integer; ∑: summation. The AC calculations consider resistance, without a complete reactance and power-factor calculation. E: energy (kWh); M: mass (kg); V: volume (m³); A: area (m²); H: person-hours or height (m), according to the calculation; θ: module tilt; α: design solar-elevation angle. S denotes apparent power (kVA) in transformer/UPS calculations and cross-section (mm²) in cable calculations. SOC/SOH/η/k are dimensionless ratios.

Structures, elevated frames and foundations: not selected or priced. Structural, wind, anchor and foundation drawings and an existing-condition survey are required.

BESS and backup: not selected or priced. Confirm models, BMS/PCS, cables and protection, demand on each phase, fire safety, transfer time and current prices.

New substation: not selected or priced. Confirm the connection agreement, MV route, short-circuit design, civil work and utility scope.

STANDARDS AND REFERENCE DOCUMENTS

TCVN/IEC documents are standards, not automatically QCVN technical regulations. Mandatory application depends on legal references and project scope. The algebraic formulas below are not verbatim clauses. Legal/design compliance has not been confirmed for a specific

QuangAnhcons

project. Check Decree 58/2025, as amended by Decree 243/2026, and local construction, land and fire-safety requirements. Ground-mounted yard systems do not automatically fall under rooftop-Solar procedures; do not assume that a 2 m threshold exempts them from permits.

TCVN 7447-7-712:2019 | Low-voltage PV installations
https://tieuchuan.vsqi.gov.vn/tieuchuan/view?sohieu=TCVN+7447-7-712%3A2019

IEC 62548-1:2023 + AMD1:2025 | PV-array design, DC wiring, protection and earthing
https://webstore.iec.ch/en/publication/110893

IEC 60364-5-52 / IEC 60364-5-54 | Conductors, derating and PE; check the contractually selected edition
https://www.electrical-installation.org/enwiki/General_method_for_cable_sizing

IEC 62446-1:2016 + AMD1:2018 | Documentation, inspection and commissioning of grid-connected systems
https://webstore.iec.ch/en/publication/63726

TCVN 2737:2023 | Loads, actions and combinations; structural documentation required
https://tieuchuan.vsqi.gov.vn/tieuchuan/view?sohieu=TCVN+2737%3A2023

TCVN 4474:1987 | Building drainage; actual rainfall and hydraulic data required
https://tieuchuan.vsqi.gov.vn/tieuchuan/view?sohieu=TCVN+4474%3A1987

IEC 62930:2017 | PV DC cable requirements
https://webstore.iec.ch/en/publication/28067

QCVN 18:2021/BXD | Construction safety; determine the project's applicable scope
https://congbao.chinhphu.vn/van-ban/thong-tu-so-16-2021-tt-bxd-36401/39129.htm

QCVN 06:2022/BXD + Amendment 1:2023 | Fire safety; check scope, building type and alterations
https://congbao.chinhphu.vn/van-ban/thong-tu-so-09-2023-tt-bxd-40285/46763.htm

Decree 243/2026/ND-CP | Amendments concerning Decree 57/2025 and Decree 58/2025; prepare a project-specific register
https://vanban.chinhphu.vn/?docid=218605&pageid=27160

IEC 63027:2023 | DC arc detection/interruption equipment; this does not establish a universal installation obligation
https://webstore.iec.ch/en/publication/27362

IEC 62116:2014 | Anti-islanding testing; this is different from zero-export control
https://webstore.iec.ch/en/publication/6479

IEC 61727:2004 | PV-grid interface; confirm the specific connection requirements
https://webstore.iec.ch/en/publication/5736

IEC 61724-1:2021 | PV performance monitoring; it does not prescribe one logger per 4 inverters
https://webstore.iec.ch/en/publication/65561

Sungrow Logger1000A/B UM Ver125-202604 | Sections 2.4, 5.3, 5.5, 5.6, 10.14: device limits, cables, PoC metering and cascading; not a pricing standard
https://info-support.sungrowpower.com/product-materials/b341b802-6161-4601-b5b2-c616244973cc.pdf

LONGi Solar LR7-72HVH-640M
https://static.longi.com/LR_7_72_HVH_640_670_M_30_30_and_15_Scientist_BGV_02_20250313_EN_1e80b0045b.pdf


Sungrow SG10RT-P2
https://info-support.sungrowpower.com/product-materials/9d6fde1d-1b2a-456f-8c23-afebe931515e.pdf

QuangAnhcons

4. Baseline implementation schedule

24 relative working days, Monday-Saturday, 8 hours/day. Day 1 starts after scope and implementation conditions are agreed. Dates, supplier lead times, grid/owner approvals, outage windows and site method statements require confirmation.

WBS	Task	Days	Start	Finish	FS	Resources
1	Survey, scope confirmation and roof data	2	1	2	-	Per method statement
2	Design, coordination and material approval	2	3	4	1	Per method statement
3	Awaiting grid-connection / owner confirmation	5	5	9	2	Per method statement
4	Procurement, fabrication and delivery	10	5	14	2	Per method statement
5	Mobilisation and site preparation	2	15	16	3,4	Per method statement
6	Frames, modules, cable trays and walkways	1	17	17	5	Per method statement
7	Cable installation, terminations, switchboards and earthing	2	18	19	6	Electrical crew of 1
8	Testing, commissioning and acceptance	2	20	21	7	Per method statement
9	As-built records, handover and site clearance	3	22	24	8	Per method statement

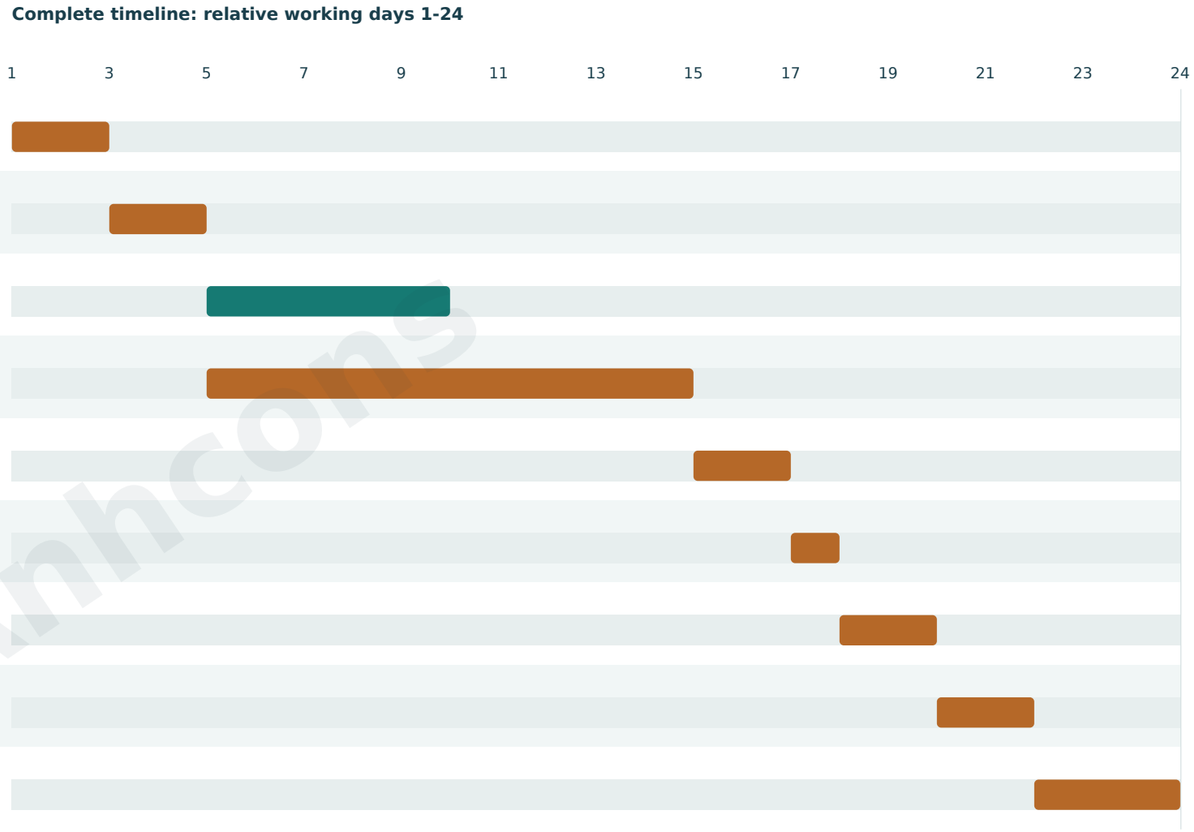


Brown: critical path. Green: float. FS: finish-to-start. No resource levelling or public-holiday adjustment.

The backward/forward CPM calculations are editable in the English Excel Schedule sheet. This plan is a baseline for discussion; it is not a delivery commitment.

QuangAnhcons

5. Monthly generation and direct consumption

Illustrative Ho Chi Minh City (10.8231 N, 106.6297 E), 10-degree south-facing array, crystalline silicon, ERA5 2023 via JRC PVGIS 5.3. DC 10.24 kWp; assumed AC limit 10 kW. PVGIS system-loss input 14%, applied once. No additional PR deduction. Not measured site data or a generation guarantee.

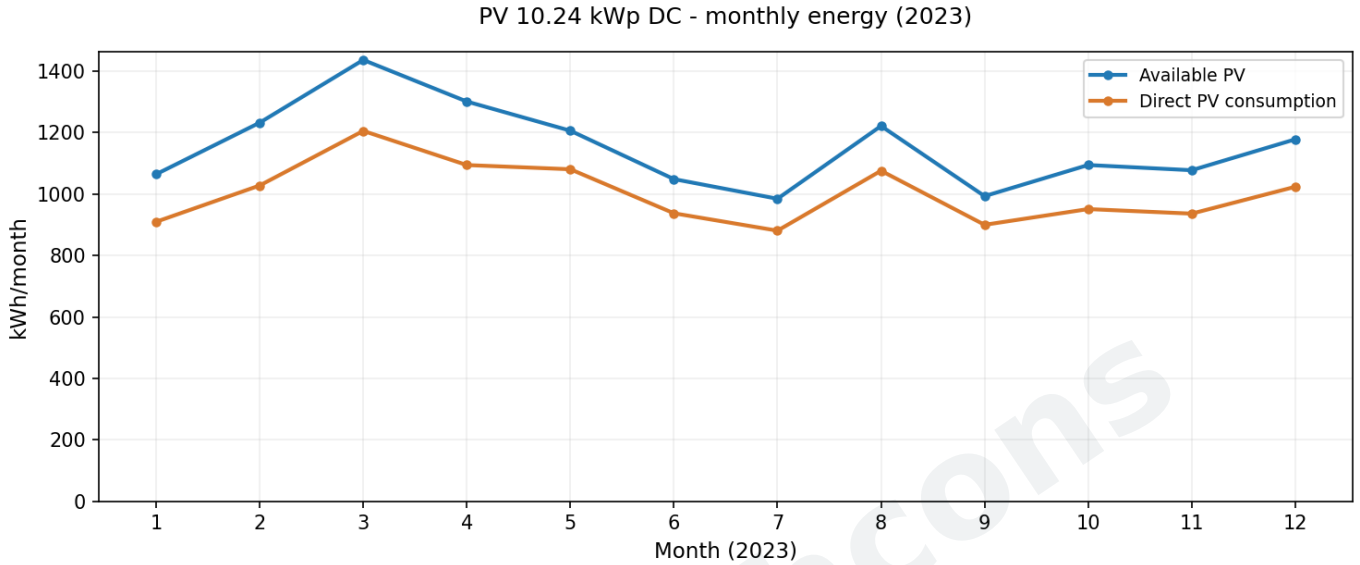


Month	Available PV (kWh)	Direct PV (kWh)	PV surplus (kWh)	Demand (kWh)
1	1,064.69	909.82	154.87	2,208.00
2	1,232.57	1,028.01	204.56	2,023.20
3	1,436.85	1,205.78	231.07	2,265.30
4	1,301.44	1,094.56	206.87	2,125.50
5	1,206.38	1,080.85	125.53	2,265.30
6	1,048.78	937.51	111.27	2,184.60
7	984.77	880.91	103.86	2,206.20
8	1,221.79	1,076.02	145.77	2,265.30
9	993.34	899.95	93.39	2,184.60
10	1,094.70	951.18	143.51	2,206.20
11	1,077.73	936.34	141.39	2,184.60
12	1,178.35	1,023.79	154.56	2,206.20

Available PV total in the source model window: 13,841.38 kWh. Monthly values shown to two decimals may differ slightly from the full-precision annual sum. Direct consumption is calculated per source hour before aggregation, not MIN of monthly totals.

QuangAnhcons

Representative 24-hour curve

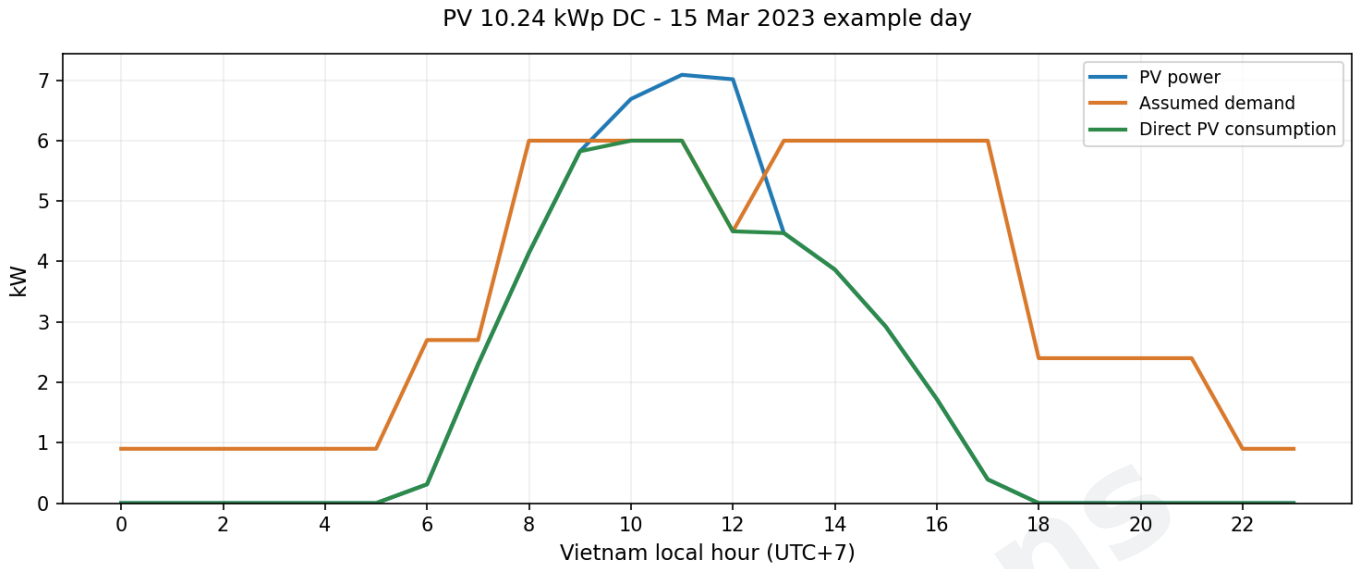

15 Mar 2023 example day. PV self-consumption is the lesser of available PV and assumed demand for each source time step. Surplus is assumed curtailed under zero export. No surplus-sale revenue is assumed.

QuangAnhcons

Assumed demand: 24 local-hour values

Local hour	Monday-Saturday (kW)	Sunday (kW)
00:00	0.900	0.900
01:00	0.900	0.900
02:00	0.900	0.900
03:00	0.900	0.900
04:00	0.900	0.900
05:00	0.900	0.900
06:00	2.700	0.900
07:00	2.700	0.900
08:00	6.000	0.900
09:00	6.000	0.900
10:00	6.000	0.900
11:00	6.000	0.900
12:00	4.500	0.900
13:00	6.000	0.900
14:00	6.000	0.900
15:00	6.000	0.900
16:00	6.000	0.900
17:00	6.000	0.900
18:00	2.400	0.900
19:00	2.400	0.900
20:00	2.400	0.900
21:00	2.400	0.900
22:00	0.900	0.900
23:00	0.900	0.900

Method, equations and limits

$P_{self}(t) = \min(P_{PV,AC}(t), P_{load}(t))$; $E_{self} = \Sigma P_{self}(t) \times \Delta t$; $P_{surplus}(t) = \max(P_{PV,AC}(t) - P_{self}(t), 0)$. Grid import = $\max(P_{load} - P_{self}, 0)$. $\Delta t = 1$ hour.

11:00 illustrative/mean slot: PV 7.090 kW; demand 6.000 kW; direct PV 6.000 kW. min(7.090, 6.000) × 1 h = 6.000 kWh.

Source: https://re.jrc.ec.europa.eu/api/v5_3/seriescalc?lat=10.8231&lon=106.6297&startyear=2023&endyear=2023&pvcalculation=1&peakpower=10.24&loss=14&angle=10&aspect=0&mountingplace=building&raddatabase=PVGIS-ERA5&outputformat=json

QuangAnhcons

Source snapshot SHA-256: 0fc76a31475b471c27ee472b6065a839b34b47d644c350e3ae371d233d80ef42

6. Standards, technical checks and acceptance

The references below were reviewed on 05 Nov 2026. They include Decree 58/2025, as amended by Decree 243/2026, current electrical-safety regulations and fire-safety requirements for the building type. Applicable procedures depend on the connection diagram, responsible entity and operating mode; they cannot be inferred solely from the capacity label or inverter voltage. Selected standards and mandatory regulations have different scopes. This is a pre-survey reference configuration, not confirmation of compliance at a specific site.

Before implementation, finalise the connection diagram, roof/anchor/wind checks, protection coordination, fire-safety scope and applicable notification/registration or other procedures. A list of standards alone does not certify that the configuration meets every requirement of a particular project.

Read the connection and surplus-electricity sale conditions.

Decree 58/2025/ND-CP, as amended by Decree 243/2026/ND-CP

Identify self-generation/self-consumption arrangements and procedures for the project, responsible entity and connection point.

https://vanban.chinhphu.vn/?classid=2629&docid=218762&pageid=27160

Decree 243/2026/ND-CP

Surplus-electricity provisions and related amendments. This self-consumption estimate does not assume revenue from surplus sales.

https://vanban.chinhphu.vn/?classid=1&docid=218605&pageid=27160

QCVN 25:2025/BCT; Circular 41/2025/TT-BCT

Electrical safety. Check the actual work and operating scope.

https://vbpl.moj.gov.vn/TW/Pages/vbpq-toanvan.aspx?ItemID=179103

Decree 105/2025/ND-CP, as amended by Decree 347/2026/ND-CP

Fire-safety duties depend on building type and alterations. Storage requires a separate assessment.

https://xaydungchinhsach.chinhphu.vn/nghi-dinh-347-2026-nd-cp-sua-doi-4-nghi-dinh-ve-khoa-hoc-cong-nghe-phong-chay-chua-chay-an-ninh-trat-tu-phong-chong-te-nan-xa-hoi-bao-luc-gia-dinh-119260908161503549.htm

QCVN 06:2022/BXD and Amendment 1:2023

Fire safety for buildings and structures. Check the building type and the scope of alterations.

https://moc.gov.vn/vn/Pages/ChiTietVanBan.aspx?TypeVB=2&vID=5126

TCVN 7447-7-712:2019

Low-voltage PV electrical installations.

https://tieuchuan.vsqi.gov.vn/tieuchuan/view?sohieu=TCVN+7447-7-712%3A2019

IEC 60364-7-712:2025

Check PV installation design against the selected edition.

https://webstore.iec.ch/en/publication/65748

IEC 62548-1:2023 + AMD1:2025

PV-array design, DC wiring, protection and earthing; it does not replace the complete BESS design.

https://webstore.iec.ch/en/publication/110893

TCVN 11855-1:2017

PV documentation, inspection and testing within the standard's scope.

https://tieuchuan.vsqi.gov.vn/tieuchuan/view?sohieu=TCVN+11855-1%3A2017

QuangAnhcons

TCVN 2737:2023

Loading, wind and load combinations. Roofs, anchors and structures require a separate survey and calculation.

https://tieuchuan.vsqi.gov.vn/tieuchuan/view?sohieu=TCVN+2737%3A2023

• Before installation: check drawings, weatherproofing details, exact model catalogues, work-at-height safety and electrical isolation.

• Before energisation: check string polarity, open-circuit voltage, insulation, earthing, AC/DC continuity, protection settings and export-limiting status.

• Before handover: as-built records, testing/energisation records, monitoring configuration, maintenance instructions and equipment warranties.

Provenance and numerical control

Source Vietnamese Product #54762; native English Product #55143. Reference QAC-SOL-EST-20261104-E24CAA4E. 53 BOQ lines; line extension = quantity × unit selling price, rounded half-up to whole VND; VAT scenario 10%. All source commercial notes and the preliminary engineering annex are retained in English.

Original PDF SHA-256: e97aa1ee036372eaac18e607caa79668d29d284cbb6da829449471b8f9c3d0b8
Original Excel SHA-256: a6915b14ebccad045398bc49d085d211cb3bfd67463cd642c4c015566b9d5035

QuangAnhcons