SOLAR EPC

50 kWp rooftop Solar

INDICATIVE QUOTATION AND ENGINEERING REFERENCE

REFERENCE ONLY - SUBJECT TO FORMAL CONFIRMATION. This pre-survey estimate preserves the original quantities, unit selling prices and quotation reference. Supplier purchase prices, the roof, point of connection and contract-specific taxes require confirmation. It is not an approved design, signed offer, compliance certificate or outage-backup commitment.

QUANG ANH ELECTRICAL CONSTRUCTION COMPANY LIMITED

Floor 9, Pearl Plaza Office Tower, 561A Dien Bien Phu, Thanh My Tay Ward, Ho Chi Minh City, Vietnam

Tax identification number: 0316365712 | 0919 758 191 | sales@quanganhcgte.com | https://quanganhcgte.com/

REFERENCE ONLY - SUBJECT TO FORMAL CONFIRMATION

PRE-SURVEY ESTIMATE

Quotation reference: QAC-SOL-EST-20261104-B38ABFFC | Date: 04/11/2026

Dear Customer,

Project: Solar power system

Location: project site to be confirmed

Indicative quotation based on the available information. The scope and technical solution will be confirmed after the site survey and design review.

CONFIGURATION AND SCOPE

Required: 50.00 kWp | Planned installation: 50.56 kWp DC | 50 kW AC | DC/AC 1.011

79 LONGi Solar LR7-72HVH-640M modules; 1 Sungrow SG50CX-P2 inverters

5 strings; 15-16 modules/string. Module area 213.4 m²; entered gross roof area 400.0 m².

Standard package | Supply and installation items are listed in the detailed table.

Quotation value (VND)

Total before VAT	606,720,000
VAT scenario - 10%	60,672,000
Total including VAT	667,392,000

English edition: 05 Nov 2026. The original reference and pricing snapshot are retained. VAT is a scenario; the applicable rate is confirmed under the contract/invoice.

QuangAnhcons

1. Detailed supply and installation BOQ

79 priced lines. Original item codes, quantities, unit selling prices and line amounts are retained. VND values exclude VAT unless explicitly stated.

ID	Material / work item	Specification / scope	Unit	Qty	Unit price (VND)	Amount (VND)
	I. MAIN EQUIPMENT					312,029,698
1	LONGi Solar LR7-72HVH-640M photovoltaic module	640 Wp · 2382x1134x30mm	module	79	2,430,276	191,991,804
2	Sungrow SG50CX-P2 grid-connected inverter	50 kW AC · 400 V · 3-phase · 4 MPPT	set	1	65,523,850	65,523,850
3	Sungrow Logger1000A/B data logger - preliminary selection	Sungrow · Data acquisition and monitoring. Export-control capability depends on the confirmed configuration.	set	1	21,415,315	21,415,315
4	RS485 shielded twisted-pair cable, 2 × 0.75 mm²		m	50	35,713	1,785,650
5	RJ45 Cat6 UTP Ethernet patch lead, 1.5 m		piece	2	95,238	190,476
139	Bidirectional power meter/transducer at the point of connection	Bidirectional power measurement for control at the point of connection.	piece	1	7,141,384	7,141,384
140	PCC metering CT/VT scope - voltage level and diagram require confirmation	Metering scope. Confirm the CT/VT configuration against the approved diagram.	lot	1	14,279,822	14,279,822
141	Export-control integration and response/loss-of-signal testing	Export-limiting integration and interlock testing to the confirmed design.	lot	1	4,940,147	4,940,147
142	Network infrastructure, auxiliary power and monitoring enclosure - scope to be finalised	Additional monitoring infrastructure depends on the actual layout. Configuration requires confirmation.	lot	1	4,761,250	4,761,250
	II. MOUNTING STRUCTURE / ALUMINIUM MATERIALS					28,373,722
6	Standing-seam/cliplock roof clamps and fastening bolts		set	168	29,760	4,999,680
7	Extruded aluminium rail, 4.35 m long	Chiko	length	44	392,787	17,282,628
8	Aluminium rail splice with stainless-steel M8 bolts		set	34	23,809	809,506

QuangAnhcons

ID	Material / work item	Specification / scope	Unit	Qty	Unit price (VND)	Amount (VND)
9	Mid clamps for 30 mm module frames, including bolts, nuts and washers	Chiko	set	148	14,285	2,114,180
10	End clamps for 30 mm module frames, including bolts, nuts and washers	Chiko	set	20	14,286	285,720
11	Earthing clip for mid clamps	Chiko	set	148	14,285	2,114,180
12	Earthing conductor clamp with stainless-steel M8 bolt	Chiko	set	10	29,762	297,620
14	DC cable clips suited to the outer diameter of 6 mm² PV cable	Chiko	set	158	2,976	470,208
	III. DC CABLES / DC ACCESSORIES					25,674,558
17	Solar DC cable, 6 mm², 1500 VDC - black	Leader DC-6-BK · Single-core PV cable; 1 core; 1,500 VDC; UV-resistant.	m	400	29,996	11,998,400
18	Solar DC cable, 6 mm², 1500 VDC - red	Leader DC-6-RD · Single-core PV cable; 1 core; 1,500 VDC; UV-resistant.	m	400	29,996	11,998,400
19	DC connector pair matching the equipment manufacturer's brand/series	Leader · Connectors from a matching brand/series compatible with the equipment.	pair	10	38,889	388,890
20	Outdoor DC protective conduit - diameter and material to be selected	CVL	m	80	13,333	1,066,640
21	DC protective-conduit connector - to match conduit diameter	CVL	set	10	8,889	88,890
22	Black UV-resistant cable ties, 5 × 200, pack of 500	KST	pack	1	66,672	66,672
23	Black UV-resistant cable ties, 5 × 300, pack of 250	KST	pack	1	66,666	66,666
	IV. AC SWITCHBOARDS / MSB BLOCKS / ACBs / MCCBs					31,319,119

QuangAnhcons

ID	Material / work item	Specification / scope	Unit	Qty	Unit price (VND)	Amount (VND)
26	Solar enclosure - IP rating, Form and dimensions to be confirmed	Enclosure only; circuit breakers and busbars are listed separately.	piece	1	8,886,639	8,886,639
27	Copper busbars, fabrication, N/PE supports and accessories	Copper busbars, fabrication, supports and N/PE accessories.	assembly	1	4,177,281	4,177,281
28	Control fuses, 3 × 5 A, with holders		Set of 3	1	133,332	133,332
29	R-Y-B phase indicator lamps		piece	3	50,000	150,000
30	AC collector-panel multifunction meter with kWh function - model to be confirmed	Selec · Operational metering at the AC switchboard; it does not replace the control meter at the PCC.	piece	1	3,888,458	3,888,458
32	Solar MSB metering CT, 100/5 A, class 0.5S	Omega CT-100/5A class 0.5S	piece	3	388,876	1,166,628
33	Switchboard auxiliary-circuit protection - rated current to be selected	Omega	piece	1	999,971	999,971
34	Switchboard temperature sensor		piece	1	555,547	555,547
35	Switchboard ventilation fan		piece	2	1,333,232	2,666,464
36	AC SPD - Type, Uc, Up, In/Imax and coordination to be confirmed	Himel	set	1	3,888,458	3,888,458
37	Solar MSB main MCCB, 400 VAC, 100 A	Mitsubishi NF125-CV 3P 100A · Icu/Ics must suit the prospective short-circuit current at the installation point.	piece	1	2,403,173	2,403,173
38	Inverter-branch MCCB, 400 VAC, 125 A	Mitsubishi NF125-CV 3P 125A · Icu/Ics must suit the prospective short-circuit current at the installation point.	piece	1	2,403,168	2,403,168
	V. LV AC CABLES / BUSDUCT / ACCESSORIES					41,179,958
39	Inverter cable, CXV 4C-50 mm² (3P+N, separate PE)	CADIVI · Cu/XLPE/PVC · 0.6/1 kV	m	20	1,015,462	20,309,240
40	Main cable, CXV 1C-35 mm², 1 parallel runs per phase and neutral	CADIVI · Cu/XLPE/PVC · 0.6/1 kV	m	80	181,208	14,496,640

QuangAnhcons

ID	Material / work item	Specification / scope	Unit	Qty	Unit price (VND)	Amount (VND)
41	Main PE cable, CXV 1C-16 mm², 0.6/1 kV	CADIVI · Cu/XLPE/PVC · 0.6/1 kV	m	20	85,651	1,713,020
43	Copper cable lug, 35 mm² - main cable	CU-LUG-35	piece	8	19,444	155,552
44	Cable-lug connection bolts - size to suit the equipment terminals	Cadivi	set	8	22,222	177,776
45	Copper cable lug, 50 mm² - inverter phase	CU-LUG-50	piece	6	27,778	166,668
46	Copper cable lug, 25 mm² - inverter PE	CU-LUG-25	piece	2	13,889	27,778
47	35 mm² cable-lug insulating boot - red	Cadivi BOOT-35	piece	2	6,675	13,350
48	35 mm² cable-lug insulating boot - blue	Cadivi BOOT-35	piece	2	6,666	13,332
49	35 mm² cable-lug insulating boot - yellow	Cadivi BOOT-35	piece	2	6,666	13,332
50	Main neutral cable-lug insulating boot, 35 mm²	Cadivi BOOT-35	piece	2	6,666	13,332
51	50 mm² cable-lug insulating boot - red	Cadivi BOOT-50	piece	2	6,666	13,332
52	50 mm² cable-lug insulating boot - blue	Cadivi BOOT-50	piece	2	6,666	13,332
53	50 mm² cable-lug insulating boot - yellow	Cadivi BOOT-50	piece	2	6,666	13,332
54	25 mm² cable-lug insulating boot - PE colour	Cadivi BOOT-25	piece	2	6,666	13,332
55	Inverter PE cable, 1C-25 mm² Cu/XLPE/PVC, 0.6/1 kV	CADIVI · Cu/XLPE/PVC · 0.6/1 kV	m	20	132,275	2,645,500
56	AC cable protective conduit - diameter to suit cable size and fill	CVL	m	8	50,000	400,000
57	AC protective-conduit connector - to match conduit diameter	CVL	set	2	20,000	40,000
60	String labels and DC/AC warning labels		piece	20	5,000	100,000

QuangAnhcons

ID	Material / work item	Specification / scope	Unit	Qty	Unit price (VND)	Amount (VND)
61	DC/AC cable glands for inverters and switchboards		piece	15	50,000	750,000
63	Main-route copper PE cable lugs and insulating boots, 16 mm²	MAIN-PE-LUG-BOOT-16	piece	2	11,111	22,222
134	Copper inverter-neutral cable lug, 50 mm²	CU-LUG-50	piece	2	27,778	55,556
135	Inverter neutral cable-lug insulating boot, 50 mm²	BOOT-N-50	piece	2	6,666	13,332
	VI. CABLE TRAYS / LADDERS / WALKWAYS					54,778,810
64	Cable tray, 100 × 50 × 1.5 mm, including cover, connectors and bolts		m	15	214,278	3,214,170
67	AC cable-tray/ladder route - dimensions pending cable arrangement		m	40	773,538	30,941,520
78	Self-drilling screws with umbrella nuts, 2.5 cm long, fixing platforms and trays to aluminium rails		con	120	1,786	214,320
79	Walkway/access platform, 360 mm wide, 1.5 mm galvanised steel		m	20	535,649	10,712,980
81	Cable-tray supports, threaded rods and purlin clamps		set	30	142,850	4,285,500
84	Walkway/platform supports		set	15	101,189	1,517,835
85	Walkway/platform splices and connection accessories		set	8	77,380	619,040
144	Additional cable-tray/ladder accessories pending route take-off	Accessories follow the actual routes. Confirm the detailed list.	lot	1	3,273,445	3,273,445
	VII. EARTHING					3,666,609
143	Additional earthing/equipotential-bonding scope pending survey and design	Indicative scope. Earthing quantities and the solution require confirmation after the survey.	lot	1	3,666,609	3,666,609

QuangAnhcons

ID	Material / work item	Specification / scope	Unit	Qty	Unit price (VND)	Amount (VND)
	X. LABOUR AND INSTALLATION EQUIPMENT					85,212,596
111	Labour for frames, modules, access platforms, cable trays and mechanical structures		person-hour	157	106,209	16,674,813
112	Labour for cable installation, electrical terminations and earthing		person-hour	70	118,727	8,310,890
113	Roof lifting equipment		shift	1	7,498,687	7,498,687
114	Freight and delivery		trip	1	6,249,088	6,249,088
136	Site technical management and supervision	QuangAnhcons	engineer-day	16	1,499,160	23,986,560
137	Safety supervision for work at height	QuangAnhcons	person-day	16	1,062,079	16,993,264
138	Mobilisation, site organisation and clearance	QuangAnhcons	visit	1	5,499,294	5,499,294
	XI. DOCUMENTATION / REGULATORY WORK / TESTING					24,484,930
115	Review of input documents, Solar project procedures and connection checklist	EPC scope as listed. Third-party inspection/review fees are confirmed separately.	engineer-hour	10	312,485	3,124,850
116	Roof-structure survey/document review and coordination of existing-condition images/layouts	EPC scope as listed. Third-party inspection/review fees are confirmed separately.	engineer-hour	28	312,458	8,748,824
117	Preliminary engineering/SLD/layout, installation method, occupational safety and QA/QC	EPC scope as listed. Third-party inspection/review fees are confirmed separately.	engineer-hour	21	312,468	6,561,828
118	Testing, commissioning, internal acceptance and as-built/handover documentation	EPC scope as listed. Third-party inspection/review fees are confirmed separately.	engineer-hour	22	274,974	6,049,428
	Total before VAT					606,720,000
	VAT scenario - 10%					60,672,000

QuangAnhcons

ID	Material / work item	Specification / scope	Unit	Qty	Unit price (VND)	Amount (VND)
	Total including VAT					667,392,000

QuangAnhcons

2. Assumptions, commercial conditions and exclusions

PRE-SURVEY ESTIMATE

APPLIED PARAMETERS

Roof elevation: 10 m. Budget assumption. This is ground-to-roof elevation. Defaults, where not entered, are 4 m for a house, 10 m for a factory and 0 m for a yard. These are not standard heights or frame elevations. Wind loading and lifting require separate checks.

One-way DC route per string: 80 m. Estimated from the selected route. One-way length = roof elevation + horizontal run + roof run. Do not double it here; the two DC polarities are counted separately. Enter measured routes when available.

Roof coverage factor: 70%. Entered parameter, subject to verification. 70% is a preliminary layout scenario, not a substitute for the layout, fire-safety clearances or shading analysis.

Cold cell temperature: 0 °C. Budget assumption. Confirm the minimum cell temperature using site climate data and manufacturer instructions.

Hot cell temperature: 70 °C. Budget assumption. 70 °C is a scenario value. Cell temperature requires a model covering irradiance, wind and mounting conditions.

AC-current allowance: 1.00 times. Budget assumption. Use the manufacturer's maximum AC current for Ib and follow its circuit-breaker instructions. Do not treat 1.25 as a universally mandatory IEC AC factor.

Anchor spacing: 1.20 m. Budget assumption for material quantities only. Confirm wind loading, roof zones, purlin/anchor capacity, spans and rail layout.

Basic rail/clamp mass: 3 kg/m². Budget assumption. Basic rails/clamps only; selected steel frames, reinforcement and bases are counted separately in the mass check. Structural capacity has not been verified.

Productivity factor: 85%. Budget assumption. The internal productivity allowance has not been calibrated against site records.

Cliplock metal roofing, 3-phase supply. Base pricing includes modules, grid-connected inverters, ordinary module rails/clamps/feet and the listed materials and installation, assuming the existing structure is suitable. Elevated frames, foundations, reinforcement, BESS and a new substation are included only when selected and priced separately.

REQUIREMENTS AND PROPOSAL BASIS

Location: Ho Chi Minh City (simulation scenario; replace with the actual surveyed site); factory/commercial premises; Solar self-consumption; 3-phase supply; cliplock metal roof/site.

User-selected capacity

Regional QAC scenario; no site-specific simulation

Sensitivity range under the stated assumptions, not a confidence interval or guaranteed generation. It does not resolve model-specific inverter clipping, individual roof orientations or weather on the outage day.

Confirm usable area, roof orientation/pitch, shading, structural capacity, anchors and site-specific regulatory/fire-safety requirements.

Confirm the PCC, permitted capacity, cable routes, protection, export conditions and valid equipment prices.

Scenario energy yield: 65,728-85,952 kWh/year.

QUOTATION CONDITIONS

Scope: supply and installation of items with quantities in the table; grid-connected self-consumption. Battery storage is not included.

Outage backup: a design to supply loads during grid outages is not included. Energy-shifting BESS does not automatically provide backup operation.

QuangAnhcons

Point of connection: 1 Solar switchboards are expected to connect to the LV system within the selected scope. Confirm hosting capacity and short-circuit current on site.

Quantities: based on the configuration and assumed routes. Confirm after the survey, module layout and installation design. Agree scope changes in writing.

Exclusions: cliplock metal roofing, 3-phase supply. Base pricing covers modules, grid-connected inverters, ordinary module rails/clamps/feet and the materials and installation listed in the table, assuming the existing structure is suitable. Elevated frames, foundations, reinforcement, BESS and a new substation are included only when selected and priced separately. Unpriced items, new fire-fighting or direct-strike lightning systems and third-party fees outside the table are excluded.

Technical basis: formulas and results are provided in the calculation annex. References include TCVN 7447-7-712:2019, TCVN 2737:2023, IEC 62548-1 and IEC 62446-1. This preliminary configuration does not replace an approved design.

Taxes and validity: unit prices exclude VAT. VAT is provisional at the stated rate and is applied under the contract/invoice. Prices are reconfirmed when the order is placed.

Schedule: agreed after the survey, scope definition, supply confirmation and installation conditions.

Payment (EPC/installation): milestones and percentages are agreed by both parties in the contract.

Warranty: subject to the policies for the exact equipment models and the installation terms agreed in the contract.

Contact: Sales Department | QuangAnhcons | 0919758191 | sales@quanganhcgte.com | quanganhcgte.com

Indicative schedule: 50 working days, including 16 site days. Monday-Saturday calendar; holidays and outage windows are not deducted. This is not an execution commitment.

Preliminary results use the entered information and displayed assumptions. A survey, design verification and written confirmation of prices/scope are required before ordering or installation. This is not an approved design or a backup-supply commitment. Current legal obligations still apply.

Developed and operated by QuangAnhcons. © 2026 QUANG ANH ELECTRICAL CONSTRUCTION COMPANY LIMITED. This quotation was prepared by QuangAnhcons. Retain the preparer's name and reference number when saving or sharing. Third-party names and documents belong to their respective owners.

3. Electrical calculations with substituted values

Actual DC nameplate capacity

Formula: $P_{DC} = N_{module} \times P_{module}/1{,}000$ (kWp).**Substitution:** 79 × 640 / 1,000 = **50.56 kWp DC**.

Inverter capacity and DC/AC ratio

Formula: $r = P_{DC} / P_{AC}$.**Substitution:** 50.56 / 50 = **1.0112 times**.

Module surface area and usable roof area

Assumed formula: $A_{module} = N \times L \times W$.**Substitution with an example module measuring 2.382 × 1.134 m:** 79 × 2.382 × 1.134 ≈ **213.39 m² of module surface**. Actual roof area must also allow for clearances, maintenance access, walkways and shading exclusion zones. This area calculation does not certify the roof's structural capacity.

Indicative AC current for checking the electrical arrangement

Ba pha: $I \approx P/(\sqrt{3} \times U_{LL} \times \cos\varphi)$. With 50 kW, 400 V and assumed cosφ = 0.99: I ≈ 50 × 1,000/(√3 × 400 × 0.99) ≈ **72.9 A**.Select circuit breakers and cables using manufacturer Imax, corrected Iz, installation conditions, voltage drop and prospective short-circuit current. This preliminary current is not sufficient on its own for procurement.

Complete preliminary calculation annex

DC capacity

PDC = (Nmod × PSTC) / (1000)

2. Result: 50.560 kWp

Datasheet module · Preliminary result

Nominal AC capacity

PAC = Ninv × PAC,unit

2. Result: 50.000 kW

Inverter datasheet. This is not kWh generation or the actual output at every moment. · Preliminary result

DC/AC ratio

rDC/AC = (PDC) / (PAC)

2. Result: 1.011 times

Target 1.25; clipping simulation required · Preliminary result

Module area

APV = Nmod × l × b

2. Result: 213.394 m²

Dimensions for the exact model · Preliminary result

Module mass

MPV = Nmod × mmod

2. Result: 2251.500 kg

Datasheet weight; excludes people, stored materials, wind, water and mounting frames · Preliminary result

PV dead load over the module area

qPV = ((MPV + Mrail + Msteel + Vfoundation × 2400) × g) / (1000 × APV)

2. Result: 0.133 kPa

Preliminary mass includes the selected steel/frame and bases; concrete density is assumed at 2,400 kg/m³. An average load does not replace concentrated anchor/foot loads, wind loads or roof/foundation structural verification. · Preliminary result

Ponding load

qw = hmm × 0.00980665

2. Result: Additional data required

Illustrative additional load; 0 means not entered, not confirmation that the risk is absent · Ponding depth not entered

Rainwater drainage

Qrain = (C × i × Aroof) / (3600)

2. Result: Additional data required

Flow continuity. Confirm rainfall intensity, catchment area, slope and drainage cross-section. · Additional data required

Outlet count for the entered drainage capacity

Noutlet = ⌈(Qrain) / (qoutlet)⌉

2. Result: Additional data required

Not calculated without rainfall intensity i and outlet capacity q. · Additional data required

Water per cleaning cycle

Vw = APV × vw

2. Result: 426.788 L

Entered operating allowance; it does not automatically change the water-system material scope · Preliminary result

Cleaning-water flow rate

Qw = (Vw) / (1000 × th)

QuangAnhcons

2. Result: 0.107 m³/h

Pump head = elevation + losses + nozzle pressure. Flow alone does not select the pump. · Preliminary result

Cold-string Voc

Uoc,cold = Nmax × Uoc × [1 + |βVoc| × (25 − Tmin)] × 1.03

2. Result: 929.225 V

Inverter limit; the 3% reserve is a design assumption · Preliminary result

Hot-string Vmp

Ump,hot = Nmin × Ump × [1 + βVmp × (Tmax − 25)]

2. Result: 563.594 V

Provisional Vmp coefficient −0.34%/°C; manufacturer confirmation required · Preliminary result

DC cable length per polarity

LDC,+ = LDC,− = Nstr × Lavg

2. Result: 400.000 m

Measured or assumed route: 80 m · Preliminary result

DC voltage drop

ΔuDC = (2 × Imp × ρ × L) / (S × Ump,hot) × 100%

2. Result: 1.536 %

STC Imp, rho=22.5 Ω·mm²/km and hot-string Vmp. Check bifacial current, Iz and connectors against manufacturer requirements. · Preliminary result

AC branch - Iz

Iz = Iz,tab × kT × kg × nparallel

2. Result: 130.312 A

Cu XLPE reference ampacity for installation methods C/F with 3 loaded conductors. Confirm cable arrangement and neutral loading. · Preliminary result

AC branch - voltage drop

ΔuAC ≈ (√3 × Ib × ρ × L) / (S × nparallel × ULL) × 100%

2. Result: 0.326 %

Preliminary resistance-only calculation; it does not replace Rcosφ+Xsinφ or short-circuit checks · Preliminary result

Main AC route - Iz

Iz = Iz,tab × kT × kg × nparallel

2. Result: 107.016 A

Cu XLPE reference ampacity for installation methods C/F with 3 loaded conductors. Confirm cable arrangement and neutral loading. · Preliminary result

Main AC route - voltage drop

ΔuAC ≈ (√3 × Ib × ρ × L) / (S × nparallel × ULL) × 100%

2. Result: 0.465 %

Preliminary resistance-only calculation; it does not replace Rcosφ+Xsinφ or short-circuit checks · Preliminary result

Installation-phase person-hours

Hinstall = Hbase,mount + Hstructure + HBESS + HTX

2. Result: 157.000 person-hours

Includes base installation labour and selected additional work. These are person-hours, not elapsed hours. · Preliminary result

Electrical person-hours

H = ⌈(Hbase) / (ηlabor)⌉

2. Result: 70.000 person-hours

Cables, connectors, inverters, switchboards and earthing · Preliminary result

QuangAnhcons

Installation-phase working days

Dinstall = ⌈(Hinstall) / (Ncrew × hday)⌉

2. Result: 4.000 working days

Additional installation person-hours are included. Confirm the actual sequence and crews. · Preliminary result

Electrical working days

Delec = ⌈(Helec) / (Nelec × hday)⌉

2. Result: 5.000 working days

Electrical crew of 2 · Preliminary result

AC overload protection

Ib ≤ In ≤ Iz; I2 ≤ 1.45 × Iz

2. Result: Additional data required

Protection-selection relationships. Check IEC 60364, circuit-breaker characteristics and manufacturer instructions. The calculator has not verified I2, disconnection times, Icu/Ics or selectivity. · Additional data required

PE thermal withstand

SPE ≥ (√(Ifault2 × t)) / (k)

2. Result: Additional data required

Adiabatic method within its applicable scope. Fault current, clearing time and the correct material/insulation factor k are required. There are insufficient data for a conclusion. · Additional data required

Logger count by control domain

Ld = min {L ∈ ℕ, L ≥ 1 : Ndev,d + c(L − 1) ≤ 30L}; Nlogger = ∑ Ld

2. Result: 1.000 units

Manufacturer limit of 30 devices. Allowance for downstream loggers is a topology assumption. Cascading, response time and the actual number of switchboards/PCCs are not confirmed. · Preliminary result

Module upper-edge elevation above ground

Htop = Hroof + c + l × sin θ

2. Result: 10.610 m

The entered roof elevation is at the lower module-row edge; one portrait module is assumed. Do not infer total building height from floor count. · Preliminary result

Frame and reinforcement steel mass

Madded = Mframe + Mreinforcement

2. Result: 0.000 kg

Sum the selected steel items without counting the base rails/clamps again. Allowances support budgeting only; structural drawings are required. · Preliminary result

Base and foundation mass

Mfoundation = Vfoundation × ρconcrete

2. Result: 0.000 kg

Concrete density 2,400 kg/m³. Volumes follow the allowance for each mounting arrangement. Concentrated loads and ground conditions have not been checked. · Preliminary result

Wind, anchor and structural-capacity checks

Ed ≤ Rd

2. Result: Additional data required

Site coordinates, wind zone/terrain, height, roof dimensions, edge/corner zones, materials, purlins, connections and ground conditions are required. Structural capacity cannot be inferred from kg/m² alone. · Additional data required

Horizontal projection of the modules

Ahorizontal = APV × cos θ

2. Result: 210.150 m²

Geometric relationship only; it does not determine clearances, shading or generation. · Preliminary result

QuangAnhcons

Installation person-hours including additional scope

Htotal = Hbase,mount + Hbase,elec + Hstructure + HBESS + HTX

2. Result: 227.000 person-hours

Selected structural, BESS and substation labour is included in the schedule. Its allocation to the installation phase is an allowance; the actual crews must be agreed. · Preliminary result

Module mass per module area

mA = (MPV) / (APV)

2. Result: 10.551 kg/m²

Uses the data for the displayed option. Confirm actual dimensions and layout. · Preliminary result

Usable roof area

Ausable = max(0; Agross − Aexcluded) × kslope

2. Result: 400.000 m²

Uses the data for the displayed option. Confirm actual dimensions and layout. If the input is a horizontal roof projection and modules follow the roof, k = 1/cos(roof pitch); otherwise k = 1. · Preliminary result

Ancillary area and clearances

Aaccess = max(0; Aroof − APV)

2. Result: 186.606 m²

Uses the data for the displayed option. Confirm actual dimensions and layout. · Preliminary result

Annual energy - low scenario

Eyear = round(PDC × Ylow; 0)

2. Result: 65728.000 kWh/year

Energy scenario based on the displayed inputs and assumptions. Hourly PV/demand has not been simulated here and generation is not guaranteed. · Preliminary result

Annual energy - high scenario

Eyear = round(PDC × Yhigh; 0)

2. Result: 85952.000 kWh/year

Energy scenario based on the displayed inputs and assumptions. Hourly PV/demand has not been simulated here and generation is not guaranteed. · Preliminary result

Average daily PV energy

EPV,day = round((PDC × Y) / (365.25); 2)

2. Result: 207.640 kWh/day

Energy scenario based on the displayed inputs and assumptions. Hourly PV/demand has not been simulated here and generation is not guaranteed. · Preliminary result

Average daily electricity consumption

Eload,day = (Emonth × 12) / (365.25)

2. Result: 0.000 kWh/day

Energy scenario based on the displayed inputs and assumptions. Hourly PV/demand has not been simulated here and generation is not guaranteed. · Preliminary result

Entered target capacity

Ptarget = Pentered

2. Result: 50.000 kWp

User-selected value. Installed capacity also depends on whole-module counts, the roof and the electricity supply. · Preliminary result

N: quantity; P: power; U: voltage; I: current; S: conductor cross-section (mm²); L: one-way length (m); ρ = 0.0225 Ω·mm²/m in voltage-drop calculations; g = 9.80665 m/s²; β: temperature coefficient per 1/°C; ⌈x⌉: round up to an integer; ∑: summation. The AC calculations consider resistance, without a complete reactance and power-factor calculation. E: energy (kWh); M: mass (kg); V: volume (m³); A: area (m²); H: person-hours or height (m), according to the calculation; θ: module tilt; α: design solar-elevation angle. S denotes apparent power (kVA) in transformer/UPS calculations and cross-section (mm²) in cable calculations. SOC/SOH/η/k are dimensionless ratios.

Structures, elevated frames and foundations: not selected or priced. Structural, wind, anchor and foundation drawings and an existing-condition survey are required.

QuangAnhcons

BESS and backup: not selected or priced. Confirm models, BMS/PCS, cables and protection, demand on each phase, fire safety, transfer time and current prices.

New substation: not selected or priced. Confirm the connection agreement, MV route, short-circuit design, civil work and utility scope.

STANDARDS AND REFERENCE DOCUMENTS

TCVN/IEC documents are standards, not automatically QCVN technical regulations. Mandatory application depends on legal references and project scope. The algebraic formulas below are not verbatim clauses. Legal/design compliance has not been confirmed for a specific project. Check Decree 58/2025, as amended by Decree 243/2026, and local construction, land and fire-safety requirements. Ground-mounted yard systems do not automatically fall under rooftop-Solar procedures; do not assume that a 2 m threshold exempts them from permits.

TCVN 7447-7-712:2019 | Low-voltage PV installations
https://tieuchuan.vsqi.gov.vn/tieuchuan/view?sohieu=TCVN+7447-7-712%3A2019

IEC 62548-1:2023 + AMD1:2025 | PV-array design, DC wiring, protection and earthing
https://webstore.iec.ch/en/publication/110893

IEC 60364-5-52 / IEC 60364-5-54 | Conductors, derating and PE; check the contractually selected edition
https://www.electrical-installation.org/enwiki/General_method_for_cable_sizing

IEC 62446-1:2016 + AMD1:2018 | Documentation, inspection and commissioning of grid-connected systems
https://webstore.iec.ch/en/publication/63726

TCVN 2737:2023 | Loads, actions and combinations; structural documentation required
https://tieuchuan.vsqi.gov.vn/tieuchuan/view?sohieu=TCVN+2737%3A2023

TCVN 4474:1987 | Building drainage; actual rainfall and hydraulic data required
https://tieuchuan.vsqi.gov.vn/tieuchuan/view?sohieu=TCVN+4474%3A1987

IEC 62930:2017 | PV DC cable requirements
https://webstore.iec.ch/en/publication/28067

QCVN 18:2021/BXD | Construction safety; determine the project's applicable scope
https://congbao.chinhphu.vn/van-ban/thong-tu-so-16-2021-tt-bxd-36401/39129.htm

QCVN 06:2022/BXD + Amendment 1:2023 | Fire safety; check scope, building type and alterations
https://congbao.chinhphu.vn/van-ban/thong-tu-so-09-2023-tt-bxd-40285/46763.htm

Decree 243/2026/ND-CP | Amendments concerning Decree 57/2025 and Decree 58/2025; prepare a project-specific register
https://vanban.chinhphu.vn/?docid=218605&pageid=27160

IEC 63027:2023 | DC arc detection/interruption equipment; this does not establish a universal installation obligation
https://webstore.iec.ch/en/publication/27362

IEC 62116:2014 | Anti-islanding testing; this is different from zero-export control
https://webstore.iec.ch/en/publication/6479

IEC 61727:2004 | PV-grid interface; confirm the specific connection requirements
https://webstore.iec.ch/en/publication/5736

IEC 61724-1:2021 | PV performance monitoring; it does not prescribe one logger per 4 inverters
https://webstore.iec.ch/en/publication/65561

Sungrow Logger1000A/B UM Ver125-202604 | Sections 2.4, 5.3, 5.5, 5.6, 10.14: device limits, cables, PoC metering and cascading; not a pricing standard
https://info-support.sungrowpower.com/product-materials/b341b802-6161-4601-b5b2-c616244973cc.pdf

LONGi Solar LR7-72HVH-640M
https://static.longi.com/LR_7_72_HVH_640_670_M_30_30_and_15_Scientist_BGV_02_20250313_EN_1e80b0045b.pdf


Sungrow SG50CX-P2
https://info-support.sungrowpower.com/cms/af994f1d-bb0d-408a-b310-6ad732402c99/GUID-25D7DF3A-AC5A-4DDE-AE7D-B02E6AE8DB3C_1_en-US_PDF%20(%E4%BA%A7%E5%93%81%E4%BF%A1%E6%81%AF%E8%AE%BE%E8%AE%A1%E9%83%A8_%E5%9F%BA%E7%A1%80%E7%89%88)_1789440969930_compressed.pdf

QuangAnhcons

4. Baseline implementation schedule

50 relative working days, Monday-Saturday, 8 hours/day. Day 1 starts after scope and implementation conditions are agreed. Dates, supplier lead times, grid/owner approvals, outage windows and site method statements require confirmation.

WBS	Task	Days	Start	Finish	FS	Resources
1	Survey, scope confirmation and roof data	2	1	2	-	Per method statement
2	Design, coordination and material approval	2	3	4	1	Per method statement
3	Awaiting grid-connection / owner confirmation	20	5	24	2	Per method statement
4	Procurement, fabrication and delivery	30	5	34	2	Per method statement
5	Mobilisation and site preparation	2	35	36	3,4	Per method statement
6	Frames, modules, cable trays and walkways	4	37	40	5	Per method statement
7	Cable installation, terminations, switchboards and earthing	5	41	45	6	Electrical crew of 2
8	Testing, commissioning and acceptance	2	46	47	7	Per method statement
9	As-built records, handover and site clearance	3	48	50	8	Per method statement

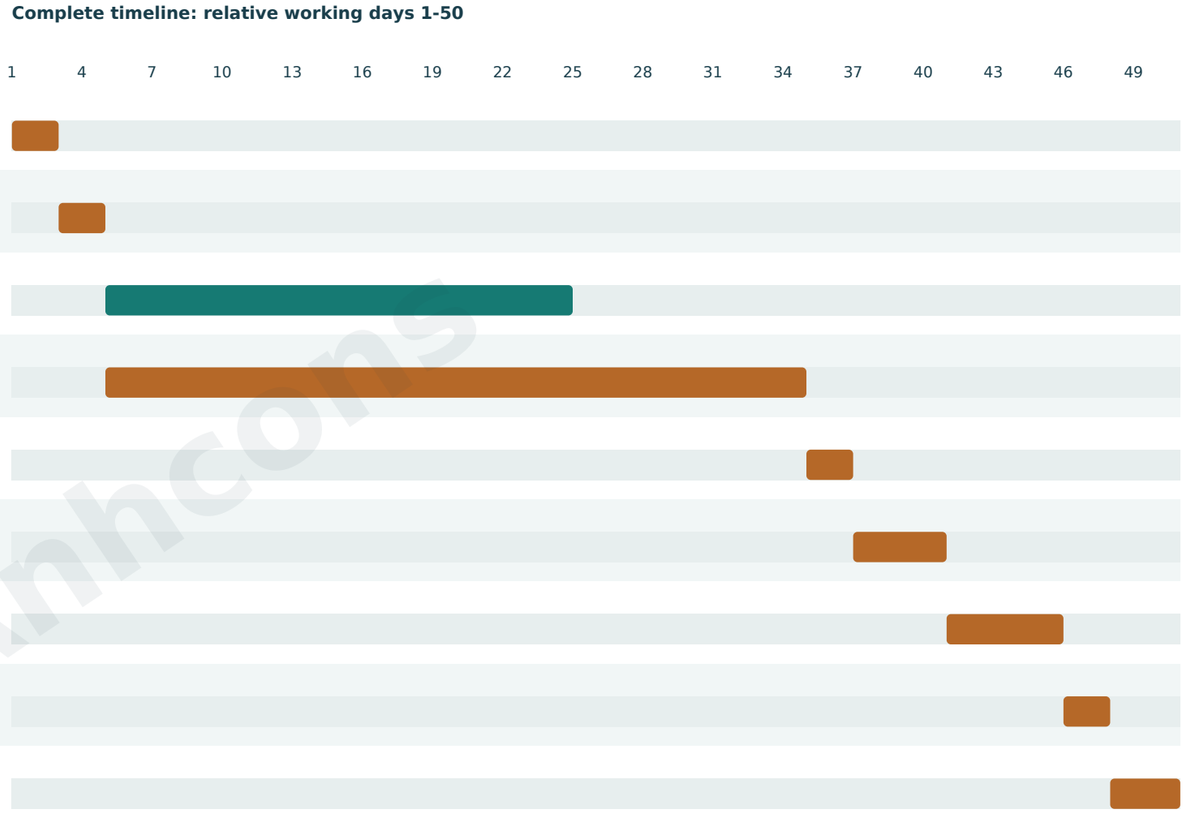


Brown: critical path. Green: float. FS: finish-to-start. No resource levelling or public-holiday adjustment.

The backward/forward CPM calculations are editable in the English Excel Schedule sheet. This plan is a baseline for discussion; it is not a delivery commitment.

QuangAnhcons

5. Monthly generation and direct consumption

Illustrative Ho Chi Minh City (10.8231 N, 106.6297 E), 10-degree south-facing array, crystalline silicon, ERA5 2023 via JRC PVGIS 5.3. DC 50.56 kWp; assumed AC limit 50 kW. PVGIS system-loss input 14%, applied once. No additional PR deduction. Not measured site data or a generation guarantee.

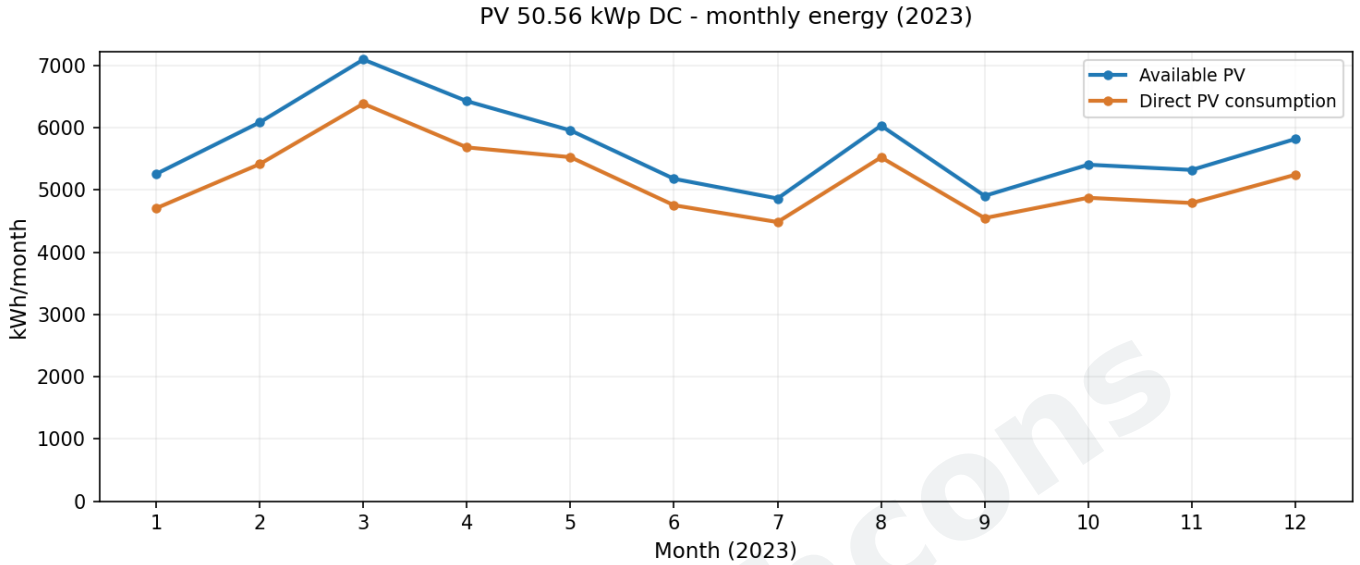


Month	Available PV (kWh)	Direct PV (kWh)	PV surplus (kWh)	Demand (kWh)
1	5,256.90	4,706.02	550.88	14,858.70
2	6,085.80	5,415.51	670.29	13,615.20
3	7,094.47	6,385.14	709.32	15,245.10
4	6,425.84	5,683.07	742.78	14,302.50
5	5,956.52	5,526.21	430.31	15,245.10
6	5,178.37	4,753.77	424.60	14,701.80
7	4,862.29	4,483.65	378.64	14,845.80
8	6,032.58	5,522.98	509.60	15,245.10
9	4,904.59	4,547.55	357.04	14,701.80
10	5,405.06	4,873.80	531.27	14,845.80
11	5,321.30	4,789.77	531.54	14,701.80
12	5,818.09	5,243.23	574.86	14,845.80

Available PV total in the source model window: 68,341.81 kWh. Monthly values shown to two decimals may differ slightly from the full-precision annual sum. Direct consumption is calculated per source hour before aggregation, not MIN of monthly totals.

QuangAnhcons

Representative 24-hour curve

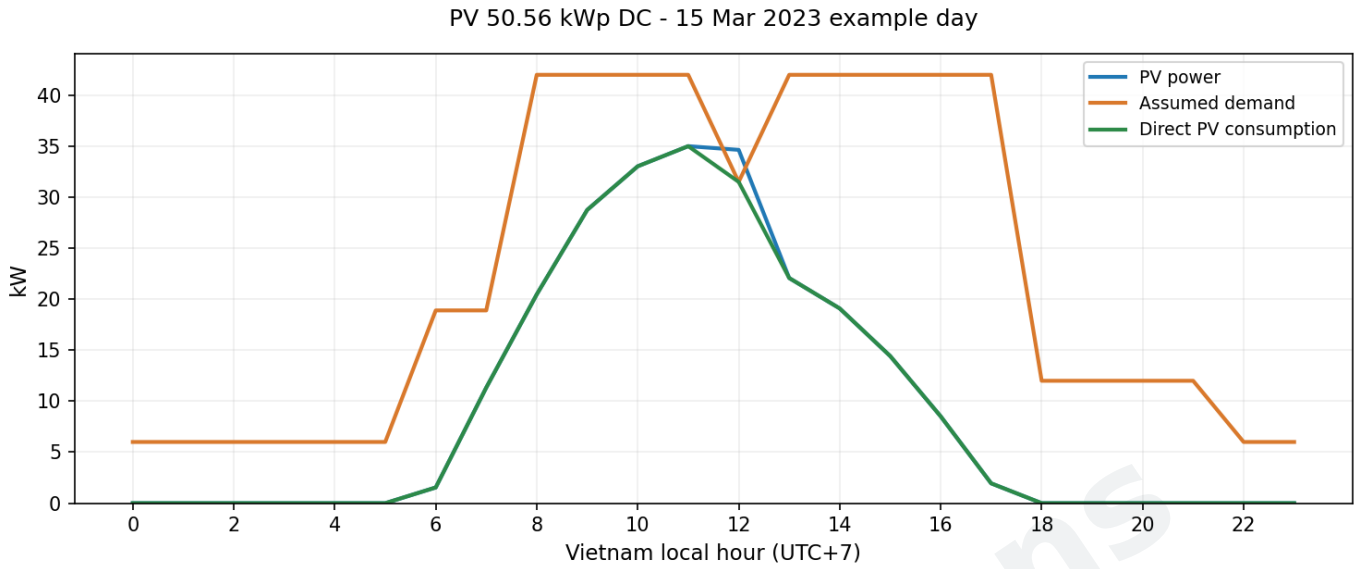

15 Mar 2023 example day. PV self-consumption is the lesser of available PV and assumed demand for each source time step. Surplus is assumed curtailed under zero export. No surplus-sale revenue is assumed.

QuangAnhcons

Assumed demand: 24 local-hour values

Local hour	Monday-Saturday (kW)	Sunday (kW)
00:00	6.000	6.000
01:00	6.000	6.000
02:00	6.000	6.000
03:00	6.000	6.000
04:00	6.000	6.000
05:00	6.000	6.000
06:00	18.900	6.000
07:00	18.900	6.000
08:00	42.000	6.000
09:00	42.000	6.000
10:00	42.000	6.000
11:00	42.000	6.000
12:00	31.500	6.000
13:00	42.000	6.000
14:00	42.000	6.000
15:00	42.000	6.000
16:00	42.000	6.000
17:00	42.000	6.000
18:00	12.000	6.000
19:00	12.000	6.000
20:00	12.000	6.000
21:00	12.000	6.000
22:00	6.000	6.000
23:00	6.000	6.000

Method, equations and limits

$P_{self}(t) = \min(P_{PV,AC}(t), P_{load}(t))$; $E_{self} = \Sigma P_{self}(t) \times \Delta t$; $P_{surplus}(t) = \max(P_{PV,AC}(t) - P_{self}(t), 0)$. Grid import = $\max(P_{load} - P_{self}, 0)$. Δt = 1 hour.

11:00 illustrative/mean slot: PV 35.005 kW; demand 42.000 kW; direct PV 35.005 kW. min(35.005, 42.000) × 1 h = 35.005 kWh.

Source: https://re.jrc.ec.europa.eu/api/v5_3/seriescalc?lat=10.8231&lon=106.6297&startyear=2023&endyear=2023&pvcalculation=1&peakpower=50.56&loss=14&angle=10&aspect=0&mountingplace=building&raddatabase=PVGIS-ERA5&outputformat=json

QuangAnhcons

Source snapshot SHA-256: 3e7a6af90d39187d0981bbae4f07fddca59c9379c78316124400fdd5dd0d6c5a

6. Standards, technical checks and acceptance

The references below were reviewed on 05 Nov 2026. They include Decree 58/2025, as amended by Decree 243/2026, current electrical-safety regulations and fire-safety requirements for the building type. Applicable procedures depend on the connection diagram, responsible entity and operating mode; they cannot be inferred solely from the capacity label or inverter voltage. Selected standards and mandatory regulations have different scopes. This is a pre-survey reference configuration, not confirmation of compliance at a specific site.

Before implementation, finalise the connection diagram, roof/anchor/wind checks, protection coordination, fire-safety scope and applicable notification/registration or other procedures. A list of standards alone does not certify that the configuration meets every requirement of a particular project.

Read the connection and surplus-electricity sale conditions.

Decree 58/2025/ND-CP, as amended by Decree 243/2026/ND-CP

Identify self-generation/self-consumption arrangements and procedures for the project, responsible entity and connection point.

https://vanban.chinhphu.vn/?classid=2629&docid=218762&pageid=27160

Decree 243/2026/ND-CP

Surplus-electricity provisions and related amendments. This self-consumption estimate does not assume revenue from surplus sales.

https://vanban.chinhphu.vn/?classid=1&docid=218605&pageid=27160

QCVN 25:2025/BCT; Circular 41/2025/TT-BCT

Electrical safety. Check the actual work and operating scope.

https://vbpl.moj.gov.vn/TW/Pages/vbpq-toanvan.aspx?ItemID=179103

Decree 105/2025/ND-CP, as amended by Decree 347/2026/ND-CP

Fire-safety duties depend on building type and alterations. Storage requires a separate assessment.

https://xaydungchinhsach.chinhphu.vn/nghi-dinh-347-2026-nd-cp-sua-doi-4-nghi-dinh-ve-khoa-hoc-cong-nghe-phong-chay-chua-chay-an-ninh-trat-tu-phong-chong-te-nan-xa-hoi-bao-luc-gia-dinh-119260908161503549.htm

QCVN 06:2022/BXD and Amendment 1:2023

Fire safety for buildings and structures. Check the building type and the scope of alterations.

https://moc.gov.vn/vn/Pages/ChiTietVanBan.aspx?TypeVB=2&vID=5126

TCVN 7447-7-712:2019

Low-voltage PV electrical installations.

https://tieuchuan.vsqi.gov.vn/tieuchuan/view?sohieu=TCVN+7447-7-712%3A2019

IEC 60364-7-712:2025

Check PV installation design against the selected edition.

https://webstore.iec.ch/en/publication/65748

IEC 62548-1:2023 + AMD1:2025

PV-array design, DC wiring, protection and earthing; it does not replace the complete BESS design.

https://webstore.iec.ch/en/publication/110893

TCVN 11855-1:2017

PV documentation, inspection and testing within the standard's scope.

https://tieuchuan.vsqi.gov.vn/tieuchuan/view?sohieu=TCVN+11855-1%3A2017

QuangAnhcons

TCVN 2737:2023

Loading, wind and load combinations. Roofs, anchors and structures require a separate survey and calculation.

https://tieuchuan.vsqi.gov.vn/tieuchuan/view?sohieu=TCVN+2737%3A2023

• Before installation: check drawings, weatherproofing details, exact model catalogues, work-at-height safety and electrical isolation.

• Before energisation: check string polarity, open-circuit voltage, insulation, earthing, AC/DC continuity, protection settings and export-limiting status.

• Before handover: as-built records, testing/energisation records, monitoring configuration, maintenance instructions and equipment warranties.

Provenance and numerical control

Source Vietnamese Product #54772; native English Product #55146. Reference QAC-SOL-EST-20261104-B38ABFFC. 79 BOQ lines; line extension = quantity × unit selling price, rounded half-up to whole VND; VAT scenario 10%. All source commercial notes and the preliminary engineering annex are retained in English.

Original PDF SHA-256: 6331ee3fcee76bea33a107f9992d6fd4a93c09bffaa65927873febee9dde8b51
Original Excel SHA-256: f7a59734eef745440226df362d7483f69e1f5ce59a456fdecc50536320360f1c

QuangAnhcons